

- 60A/90A 规格可选
- 线圈与触点间耐压为 4KV
- 环保产品（符合 RoHS）
- 外形尺寸 L×W×H: 94.8×40.3×36.2mm
- 60A/90A Available
- 4KV Dielectric Strength (Between Coil And Contact)
- Environmental Friendly Product (RoHS Compliant)
- Dimension L×W×H: 94.8×40.3×36.2mm



MLN	90	3	12	A	L1	R	XXX
产品型号 Model	负载规格 Load	触点组数 Number of Poles	线圈电压 Coil Voltage	触点形式 Contact Form	线圈类型 Coil Type	极性特点 Polarity	特性号 Special Code
60A/90A		3: 3 组 3-pole	06, 09, 12 24, 48 VDC	A: 常开 NO B: 常闭 NC	L1: 单线圈 Single L2: 双线圈 Dual	R: 反向极性 无: 标准极性 R: Reversed Polarity Nil: Default Polarity	XXX: 客户特殊要求 XXX: Customer Special Requirement


触点参数 CONTACT PARAMETERS

触点形式 Contact Form	3a, 3b
触点材料 Contact Material	银合金 Silver Alloy
接触电阻 Contact Resistance	≤ 1mΩ (1A 6VDC)
触点负载 (阻性) Contact Rating (Res. load)	60A 250VAC 90A 250VAC
最大切换电流 Max.Switching Current	60A 90A
最大切换电压 Max.Switching Voltage	250VAC
最大切换功率 Max.Switching Power	15KVA 22.5KVA
电气寿命 Electrical Life	1×10 ⁴ 次 OPS
机械寿命 Mechanical Life	1×10 ⁵ 次 OPS

性能参数 CHARACTERISTICS

绝缘电阻 Insulation Resistance		1000MΩ Min. (500VDC)
介质耐压 Dielectric Strength		触点与线圈间 Between Coil & Contacts: 4000VAC 1min 断开触点间 Between Open Contacts: 2000VAC 1min
动作时间 Set Time		≤ 30ms
复位时间 Reset Time		≤ 30ms
冲击 Shock	功能性的 Functional	98m/s ²
	破坏性的 Destructive	980m/s ²
振动 Vibration		10Hz-55Hz 1.5mm 双振幅 (DA)
湿度 Humidity		5%-85%RH
温度范围 Ambient Temperature		-40°C ~ +85°C
封装方式 Construction		防尘罩型 Dust Protected
重量 Unit Weight		约 Approx.50g

接线图 WIRING DIAGRAM

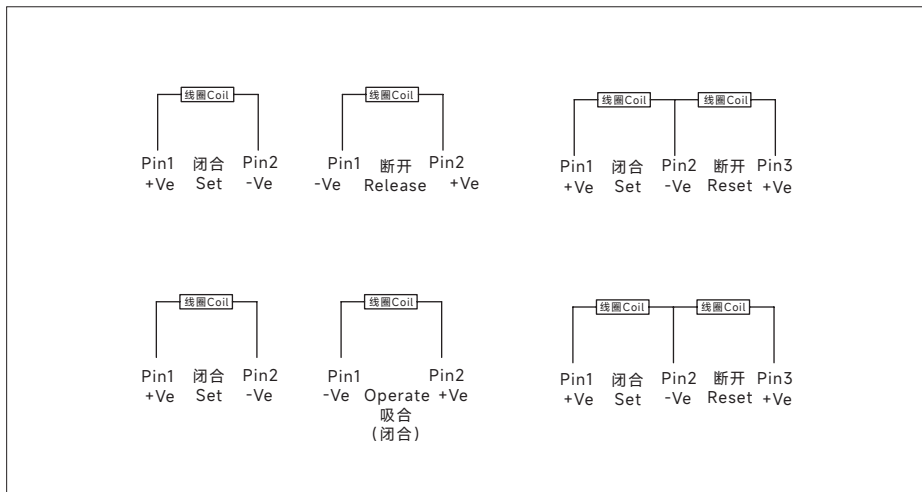

注意事项：

- 1、磁保持继电器出厂状态为动作或复归状态，但因运输或继电器安装时受到冲击等因素的影响，可能会改变状态，因而使用时（电源接入时）请根据需要重新将其设置为复归状态或动作状态；
- 2、为了确保磁保持继电器动作或复归，施加到线圈上的激励电压须达到额定电压，脉冲宽度须大于动作或复归时间的5倍；不要同时向动作线圈和复归线圈施加电压；不要长时间（大于1分钟）向线圈施加电压；
- 3、不带软铜绞线的磁保持继电器负载引出脚不能焊锡，不能随意扳动。
- 4、继电器通常为防尘罩结构，外接件按照客户特殊要求定制，所以推荐此产品的储存时间小于6个月，并注意仓储环境；同时为保证产品接触可靠性，在客户没有特别申明的情况下，我司将控制继电器触点为闭合状态。

NOTICE

- 1.Relay is on the "reset" or "set" status when being released from stock, with the consideration of shock risen from transit and relay mounting, relay would be changed to "reset" or "set" status, therefore, when application(connecting the power supply), please reset the relay to "reset" or "set" status on request.
- 2.In order to maintain "reset" or "set" status, energized voltage to coil should reach the rated voltage, impulse width should be 5 times more than "reset" or "set" time. Do not energize voltage to "reset" coil and "set" coil simultaneously. And also long energized time (more than 1min) should be avoided.
- 3.The terminals of relay without twisted copper wire can not be tin-soldered, can not be moved willfully, more over two terminals can't be fixed at the same time.
- 4.Relays used for metering measuring applications are usually made with dust proof structure, while most relays could be made specially per customer's specific requirements. No longer than 6 months' storage time is recommended for this kind of relay, and please pay attention to the storage environment. To ensure contact reliability, we will keep contact status be closed when delivery if no special required by customer.

声明 STATEMENT:

1. 本产品规格书仅供客户使用时参考，若有更改，恕不另行通知。
This product specification for client's reference, if any change without notice.
2. 对美硕而言，不可能评定继电器在每个具体应用领域的所有性能参数要求，因而客户应该根据具体的使用条件选择与之相匹配的产品，若有疑问，请与美硕联系获取更多的技术支持。但产品选型责任仅由客户负责。
MEISHUO cannot evaluate all performance parameters for each specific application. Customers should select products based on matching conditions. For technical support, please contact us. Product selection responsibility lies solely with the customer.